

CIMLINE

TACK KETTLE




500 Gallon

- Fuel Saving Single Flue Design
- Large Maintenance Hatch
- Pump or Gravity Feed
- 250 and 500 Gallon Models
- Optional Spray Bar



250 Gallon

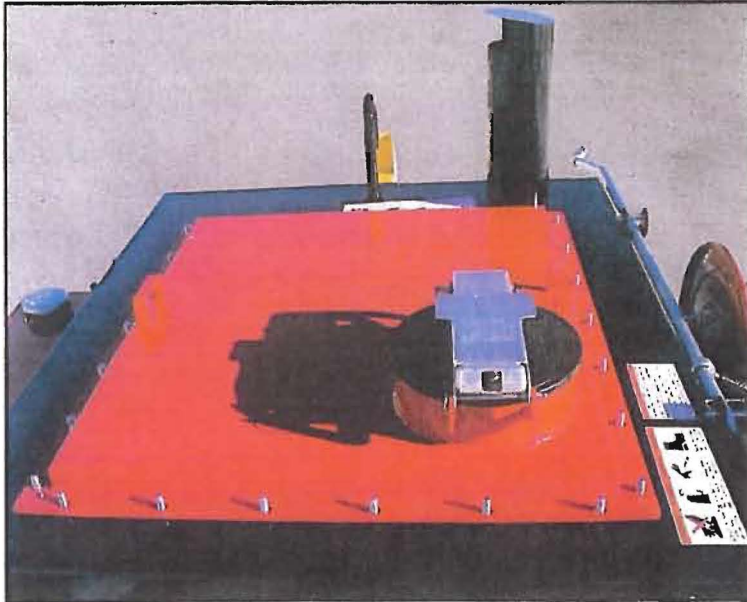

Simply unbolt and remove large maintenance hatch for easy access.

Cimline puts the latest technology to work with a line of Tack Kettles for high performance, reliable heating and application of bituminous emulsions and tack coats. These compact units employ a unique dual staggered flue design that offers even, energy-efficient heating allowing twice the heating hours from the same size propane tank as other models.

Operator features include a 36" x 32" maintenance hatch for easy clean-out, 50-feet of retractable hose, a lightweight spray wand and large solvent/flush box. On models with the optional hydraulically driven pump, a recirculation port keeps material flowing through the wand to minimize flush outs between work stoppages. These easy-to-use kettles ride on torsion axles with electric brakes for long term, low maintenance operation.

You know Cimline's leading cracksealing melter/applicator advantages for municipalities and contractors. Now discover how new technology makes better Tack Kettles for everyday operation.

WWW.CIMLINE.COM


Hand spigot allows gravity feed.

Rugged 7 gauge steel tank.

Reliable 5 hp Honda gas engine.



Recirculation port reduces delays required to flush hose and wand.

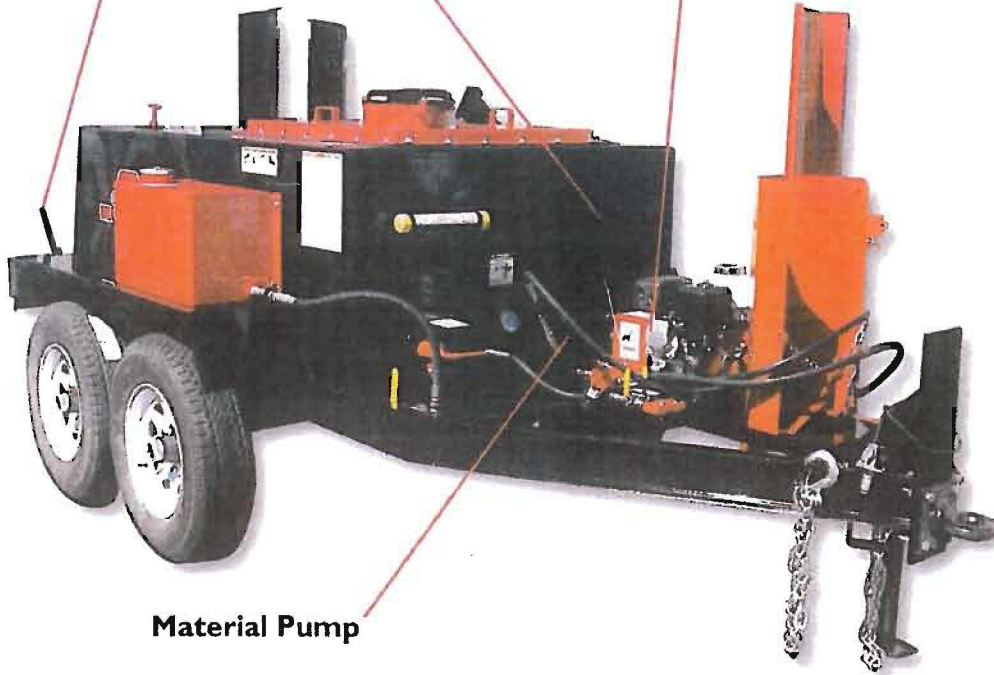

Material Pump



Handy ignitor attaches to propane tank to light burner.

Optional folding spray bar allows an 8-foot swath to be covered in one pass. Fold one side up to cover smaller areas. Hand valves at each nozzle allow the operator to adjust the spray width in one foot increments.



2601 Niagara Lane Plymouth, MN 55447 Phone: 800-328-3874 Fax: 866-557-1971



PAVEMENT MAINTENANCE GROUP